

EVERSAFE™



Your solution to FIRE SAFETY





Manual Swing Type Fire Hose Reels - Die Cast



EH-25-SDM-12GI



EH-25-SDM-09GI



EH-25-SDL-12GI




EH-19-SDM-09GI


Technical Data			DIE CAST	
ORDERING CODE	**EH25-SDM-12GI	EH25-SDM-09GI	EH25-SDL-12GI	EH19-SDM-09GI
Disc Dia	565	565	650	565
Hose	25 x 30m	25 x 30m	25 x 30m	19 x 30m
Swing dim. A x B x C	600 x 565 x 190	600 x 565 x 190	510 x 650 x 160	510 x 565 x 160
Close dim. A' x B x C	400 x 565 x 190	400 x 565 x 190	310 x 650 x 160	510 x 565 x 160
Recess dim. L x W x D	760 x 760 x 320	760 x 760 x 320	760 x 760 x 290	760 x 760 x 290
Working/ Test Pressure	12 bar / 18 bar	12 bar / 18 bar	12 bar / 18 bar	12 bar / 18 bar
Minimum Flow Rate	34 L/ min	34 L/ min	34 L/ min	28 L/ min
Drum Finishing	Red (RAL3000) Epoxy Polyester Electrostatic Powder Coating			
Design & Manufacture to	BS EN 671-1:2001			

Note: All dimensions in millimetre unless otherwise specified
Brass Jet/Spray Nozzle also available upon request


** Note: PSB approved
CE marked



SWING



CLOSE



RECESS

Manual Swing Type Fire Hose Reels - Hose Inlet



EH-25-SHM-09BR



EH-25-SHL-12BR



EH-19-SHM-09BR


Technical Data		HOSE INLET	
ORDERING CODE	**EH25-SHM-09BR	**EH25-SHL-12BR	*EH19-SHM-09BR
Disc Dia	565	650	565
Inlet Hose Connection	25 x 1.0m	25 x 1.5m	25 x 1.0m
Hose	25 x 30m	25 x 30m	19 x 30m
Swing dim. A x B x C	575 x 565 x 190	635 x 650 x 160	550 x 565 x 160
Close dim. A' x B x C	290 x 565 x 190	295 x 650 x 160	270 x 565 x 160
Recess dim. L x W x D	700 x 700 x 290	760 x 760 x 250	700 x 700 x 250
Working/ Test Pressure	12 bar / 18 bar	12 bar / 18 bar	12 bar / 18 bar
Minimum Flow Rate	34 L/ min	34 L/ min	28 L/ min
Drum Finishing	Red (RAL3000) Epoxy Polyester Electrostatic Powder Coating		
Design & Manufacture to	BS EN 671-1:2001		

Note: All dimensions in millimetre unless otherwise specified
Brass Jet/Spray Nozzle also available upon request




** Note: PSB approved
CE marked


* Note: PSB approved
CE mark pending



SWING



CLOSE



RECESS



FIRE HOSE REEL ACCESSORIES



25mm AIR RELEASE VALVE

Model :	HV 009
Body Mat.	Copper Alloy
Hydr. Tested	28 Bar
Working Pressure	10 Bar

This air release valve is applicable for wet/dry riser system



FIRE HOSE GUIDE

Model :	HRG-01	HRG-02
Body Material	Steel, Nylon Roller	Steel, Plastic Roller
Type	Mounting at Inlet Pipe	Wall Mounted
Finishing	Zinc Chromed, Black Roller	Red



NOZZLE BOX

Model :	HR 511
Body Mat.	Aluminium Alloy
Type	Wall Mounted
Glass	Clear Glass
Finishing	Red

STOP VALVE

Model :	SV-01
Body Material	Forged Brass
Type	25mm Stop Valve with Nozzle Interlock
Finishing	Plain
Working/Test Pressure	12 Bar/20 Bar




TWIST OPERATED HR JET/SPRAY NOZZLE

Model	EZ-25P, EZ-19P	EZ-25, EZ-19
Body Mat.	Nylon	Brass
Inlet	19mm, 25mm	
Finishing	Red	Chromed Plated
Test Pressure	18 Bar	
Max. Working Pre	12 Bar	
Flow Rate (6 Bar)	Jet: 55L/min & Spray : 63L/min	
Throw Range (4 Bar)	Jet : 10m & Spray : 4m	


WALL BRACKET for Fixed Type Hose Reel

Model :	HRB-01
Body Material	Steel
Type	Wall Mounted
Finishing	Galvanised



FIRE HOSE REEL (Black/Red) Features

- The 2-ply polyester yarn "Braided Construction" delivers high working and bursting pressures.
- Light in weight and very durable.
- Minimum bending radius is only 4-5 times the internal diameter.

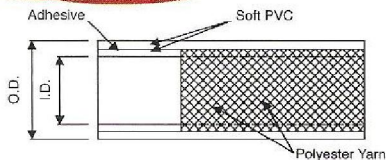

Size	Inner Dia. (I.D.) (mm)	Outer Dia. (O.D.) (mm)	Standard Length (m)	Working Pressure (kgf/cm ²) (at 20°C)	Burst Pressure (kgf/cm ²) (at 20°C)	Reference Weight (g/m)
Ø 1/2" (Black)	13±0.3	19.0±0.3	50	16.5	20°C 50, 60°C 33	202
* Ø 19 mm (Black)	19±0.5	26.2±0.5	30	15	> 48	342
Ø 25 mm (Black)	25±0.5	32.6±0.5	30	15	> 48	433
** Ø 25 mm (Red-prEN 694)	25±0.5	32.0±0.5	30	12	> 42	434
Ø 25 mm (Black-prEN 694)	25±0.5	32.0±0.5	30	12	> 42	434
Ø 38 mm (Red)	38±0.7	48.0±0.7	30	7	> 24.5	940

Note:

* SAI Global approved to AS 1221

** PSB approved (prEN 694) and SIRIM approved (MS 1488)

Available in black & red with standard length of 30m. Longer length also available upon request.

Standard of Manufacture : prEN 694, AS 1221 & BS 3169.



EVERSAFE EXTINGUISHER SDN. BHD. (053162-V)

Distributed By:



CERT. No.: FM 67491
BS EN ISO 9001:2000